


Steel Arch Ball Check Valve Class Code/ Ref. # / Breakdown

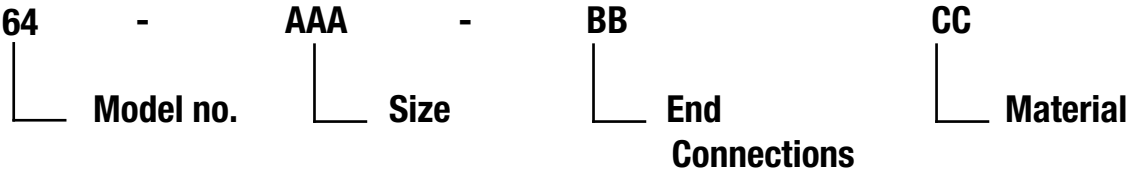


- | | | |
|-----------------|-----------------------|----------------------|
| 040 - 1.5" | FF - Flange by Flange | DI - Ductile Iron |
| 048 - 1.5" Ball | NN - NPT by NPT | SS - Stainless Steel |
| 050 - 2" | | |
| 062 - 2" O-ring | | |
| 063 - 2" Ball | | |
| 080 - 3" | | |
| 100 - 4" | | |
| 150 - 6" | | |
| 200 - 8" | | |
| 250 - 10" | | |
| 300 - 12" | | |
| 350 - 14" | | |
| 400 - 16" | | |
| 500 - 20" | | |
| 600 - 24" | | |

MODEL 64, SWING CHECK VALVE ACRONYMS :

- | | |
|--|----------------------------|
| ANSI - American National Standards Institute | NBR - Nitrile Butyl Rubber |
| AWWA - American Water Works Association | NPT - National Pipe Thread |
| DI - Ductile Iron | PUR - Polyurethane |
| EPDM - Ethylene Propylene Diene Monomer | SS - Stainless Steel |
| FL - Flange | |

MODEL 64, BALL

CHECK VALVES

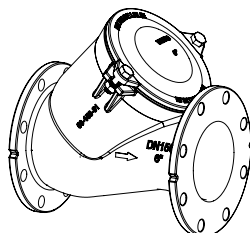Type	SAV Ref. #	Size	Weight		Price
			kg	lb	US \$
Model 64/FF FLxFL Ductile Iron Body Flanged Ends NBR Ball 150 PSI Sizes 2"-16", 20" & 24"					
	64-050-FF-DI	2"	9	19	881
	64-065-FF-DI	2.5"	12	26	985
	64-080-FF-DI	3"	15	33	1,065
	64-100-FF-DI	4"	24	53	1,369
	64-150-FF-DI	6"	40	88	2,689
	64-200-FF-DI	8"	78	172	4,905
	64-250-FF-DI	10"	136	300	11,385
	64-300-FF-DI	12"	208	459	14,665
	64-350-FF-DI	14"	314	690	38,664
	64-400-FF-DI	16"	457	1005	50,449
	64-500-FF-DI	20"	719	1581	67,320
	64-600-FF-DI	24"	1102	2425	125,592
Model 64/NN NPTxNPT Ductile Iron Body NPT Ends NBR Ball 150 PSI Sizes 1.5"-2"					
	64-040-NN-DI	1.5"	2	5	649
	64-050-NN-DI	2"	3	7	753
Model 64/NN NPTxNPT Stainless Steel Body NPT Ends NBR Ball 150 PSI Sizes 1.5"-2"					
	64-040-NN-SS	1.5"	2	5	1,257
	64-050-NN-SS	2"	3	7	1,633
Optional Epoxy Coatings	Optional Epoxy Coating Requirements				List Price Adder
	Coating to exceed 10-12 mil thickness				POA
	Holiday Free Coating Inside Only				POA
	Holiday Free Coating Outside Only				POA
	Purple (For reclaimed water)				POA

Type	SAV Ref. #	Size	Weight kg lb	Price US \$
Model 64 Replacement Ball - Sinking (Standard)	64-048-150	1.5"		180
	64-060-150	2"		205
	64-080-250	2.5"		230
	64-096-250	3"		250
	64-125-250	4"		315
	64-180-250	6"		625
	64-250-250	8"		1,130
	64-320-260	10"		2,630
	64-370-250	12"		3,850
	64-440-250	14"		POA
	64-500-250	16"		POA
	64-620-260	20"		POA
	64-750-250	24"		POA
	Use parts discount			
Model 64 Replacement Ball - Floating (Optional)	64-048-055	1.5"		170
	64-060-055	2"		180
	64-080-550	2.5"		205
	64-096-550	3"		220
	64-125-550	4"		290
	64-180-550	6"		560
	64-250-550	8"		1,050
	64-320-550	10"		2,300
	64-370-550	12"		3,400
	64-440-550	14"		POA
	64-500-550	16"		POA
	64-620-550	20"		POA
	64-750-550	24"		POA
	Use parts discount			
Model 64/FF Cover Replacement O-rings for Flanged bodies	XXX	1.5"		6
	24-150-78	2"		8
	96-100-00326	2.5"		10
	96-100-00327	3"		12
	96-100-00328	4"		20
	96-100-00329	6"		50
	96-100-00330	8"		60
	96-100-00331	10"		70
	96-100-00332	12"		125
	XXX	14"		POA
	XXX	16"		POA
	XXX	20"		POA
	XXX	24"		POA
	Use parts discount			
Model 64/NN Cover Replacement O-rings for NPT bodies	15-200-25	1.5"		6
	01-062-3	2"		8
	Use parts discount			